

■ General Characteristics



Item	Data
Standby Power (kVA)	360
Standby Power (kW)	288
Prime Power (kVA)	328
Prime Power (kW)	262
Power Factor (Cos Phi)	0.8
Diesel Engine	TCD12.1 G1
Frequency (Hz)	50
Rated Speed (rpm)	1500
Phase	3
Standard Voltage (V)	400/230
Available Voltages (V)	380/220 · 415/240

● Power Definition


Standby Power(ESP): The standby power rating is applicable for supply emergency power in variable load applications in accordance with ISO8528-1, overload is not allowed.

Prime Power(PRP): The prime power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO8528-1.

● Terms of use

According to the standard, the nominal power assigned by the genset is given for 25 °C air inlet temperature, of a barometric pressure of 100 kPa (100m A.S.L) and 30%.

■ Dimensions , weights & Fuel Tank

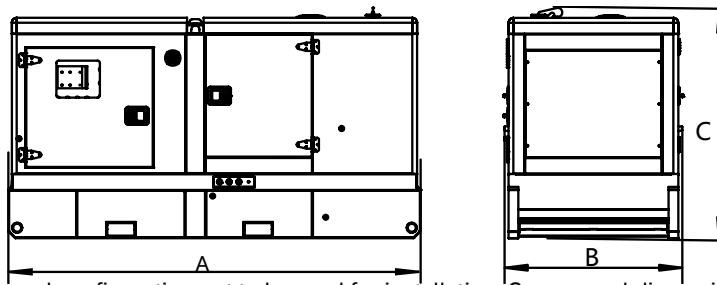

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Model	Constructure	Dim "A" mm	Dim "B" mm	Dim "C" mm	Dry Weight kg	Fuel Tank Capacity L
PDL360-O	Open set	2700	1375	2265	1650	720
PDL360-C	Silent set	4250	1650	2515	3600	650

■ Engine Data

General Engine Data	
Engine brand	DEUTZ
Engine model	TCD12.1 G1
Engine type	4-stroke diesel
Governor type	Common Rail
Injection type	Direct
Aspiration type	Turbocharged and Charge air cooling
Number of cylinders and arrangement	6-L
Bore and stroke (mm*mm)	131X150
Displacement (L)	12.1
Cooling system	Water-cooled
Lube oil consumption with full load	0.02%of fuel consumption
Compression Ratio	17:1
Air Filter	Dry
Fuel Consumption	
Fuel Consumption @ 100% load ESP (L/H)	73.6
Fuel Consumption @ 100% load PRP (L/H)	64.6
Fuel Consumption @ 75% load PRP (L/H)	48.8
Fuel Consumption @ 50% load PRP (L/H)	33.6
Air System	
Intake air flow (L/s)	329.4
Cooling air flow (L/s)	10690
Exhaust System	
Maximum exhaust temperature (°C)	511
Exhaust gas flow (L/s)	916.9
Maximum allowed back pressure (kPa)	5
Starting System	
Starting power(kW)	8.8
Recommended battery (Ah)	120
Number of Batteries	2
Auxiliary voltage (Vdc)	24
Oil System	
Engine oil capacity (L)	30
Cooling System	
Total coolant capacity (L)	20 (engine)

■ Alternator Data

Alternator Data	
Number of phase	3
Power factor (Cos Phi)	0.8
Poles	4
Winding Connections (standard)	Star-serie
Insulation	H class
Enclosure(according IEC-34-5)	IP23
Excitation system	Self-excited, brushless
Voltage regulator	AVR (Electronic)
No. of bearings	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)

■ Control Module



Protections with alarm

- Engine protections: low fuel level, low oil pressure, high engine temperature.
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage

Other Protections

- Emergency stop button.
- Panel protected through door with lockable handle

Digital Instrumentation

- Generating set voltage.
- Mains voltage.
- Generating set frequency.
- Generating set current.
- Battery voltage.
- Power (kVA-kW-kVAr)
- Power factor Cos ϕ .
- Hours-counter
- Engine speed r.p.m
- Fuel level (%)

Commands and other

- Four operation modes: OFF - Manual starting - Automatic starting - Automatic test
- Pushbutton for forcing Mains contactor or Genset contactor.
- Push-buttons: start/stop, fault reset, up/down/page/enter selection.
- Remote starting availability.
- DC system disconnection switch.
- Acoustic alarm.
- Automatic battery charger.

Protections with shutdown

- Engine protections: low fuel level, low oil pressure, high engine temperature,
- Genset protection: under/over voltage, overload, under/over battery voltage, battery charger failure.
- Circuit breaker protection: III poles.
- Earth Fault included in the control unit.