

■ General Characteristics



Item	Data
Standby Power (kVA)	1675
Standby Power (kW)	1340
Prime Power (kVA)	1400
Prime Power (kW)	1120
Power Factor (Cos Phi)	0.8
Diesel Engine	KTA50GS8
Frequency (Hz)	50
Rated Speed (rpm)	1500
Phase	3
Standard Voltage (V)	400/230
Available Voltages (V)	380/220 · 415/240

● Power Definition


Standby Power(ESP): The standby power rating is applicable for supply emergency power in variable load applications in accordance with ISO8528-1, overload is not allowed.

Prime Power(PRP): The prime power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO8528-1.

● Terms of use

According to the standard, the nominal power assigned by the genset is given for 25 °C air inlet temperature, of a barometric pressure of 100 kPa (100m A.S.L) and 30%.

■ Dimensions & Weights & Fuel Tank

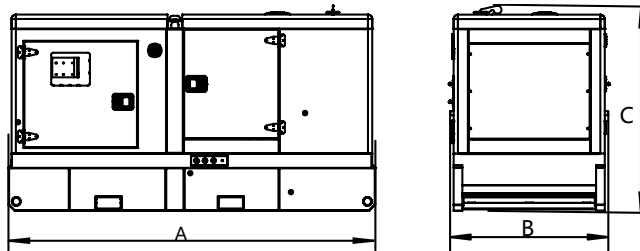

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Model	Constructure	Dim "A" mm	Dim "B" mm	Dim "C" mm	Dry Weight kg	Fuel Tank Capacity L
PCL1675A-O	Open set	5520	2270	2450	10951	/
PCL1675A-P	20ft High container	6058	2438	2896	-	/

■ Engine Data

General Engine Data	
Engine brand	Cummins
Engine model	KTA50GS8
Engine type	4-stroke diesel
Governor type	Electronic
Injection type	Direct
Aspiration type	Turbocharged and Low Temperature Aftercooled
Number of cylinders and arrangement	16-V
Bore and stroke (mm*mm)	159X159
Displacement (L)	50.3
Cooling system	Water-cooled
Lube oil consumption with full load	0.5%-1% of fuel consumption
Compression Ratio	15:1
Air Filter	Dry
Fuel Consumption	
Fuel Consumption @ 100% load ESP (L/H)	345
Fuel Consumption @ 100% load PRP (L/H)	289
Fuel Consumption @ 75% load PRP (L/H)	222
Fuel Consumption @ 50% load PRP (L/H)	155
Air System	
Intake air flow (L/s)	1655
Cooling air flow (L/s)	/
Exhaust System	
Maximum exhaust temperature (°C)	510
Exhaust gas flow (L/s)	4350
Maximum allowed back pressure (kPa)	10
Starting System	
Starting power(kW)	8.5
Recommended battery (Ah)	120
Number of Batteries	2
Auxiliary voltage (Vdc)	24
Oil System	
Engine oil capacity (L)	177
Cooling System	
Total coolant capacity (L)	348

■ Alternator Data

Alternator Data	
Number of phase	3
Power factor (Cos Phi)	0.8
Poles	4
Winding Connections (standard)	Star-serie
Insulation	H class
Enclosure(according IEC-34-5)	IP23
Excitation system	Self-excited, brushless
Voltage regulator	AVR (Electronic)
No. of bearings	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)

■ Control Module



Protections with alarm

- Engine protections: low fuel level, low oil pressure, high engine temperature.
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage

Other Protections

- Emergency stop button.
- Panel protected through door with lockable handle

Digital Instrumentation

- Generating set voltage.
- Mains voltage.
- Generating set frequency.
- Generating set current.
- Battery voltage.
- Power (kVA-kW-kVAR)
- Power factor Cos ϕ .
- Hours-counter
- Engine speed r.p.m
- Fuel level (%)

Commands and other

- Four operation modes: OFF - Manual starting - Automatic starting - Automatic test
- Pushbutton for forcing Mains contactor or Genset contactor.
- Push-buttons: start/stop, fault reset, up/down/page/enter selection.
- Remote starting availability.
- DC system disconnection switch.
- Acoustic alarm.
- Automatic battery charger.

Protections with shutdown

- Engine protections: low fuel level, low oil pressure, high engine temperature,
- Genset protection: under/over voltage, overload, under/over battery voltage, battery charger failure.
- Circuit breaker protection: III poles.
- Earth Fault included in the control unit.